SDV 16 PRO

contents:

2 LED Lighting

11 LED Effects / Controllers

20 Intelligent Lighting

24 Stage & Studio

28 Effect Lighting

30 Smoke & Haze

31 Controllers E:Cue lamps

35 HardCaseCo Road Cases

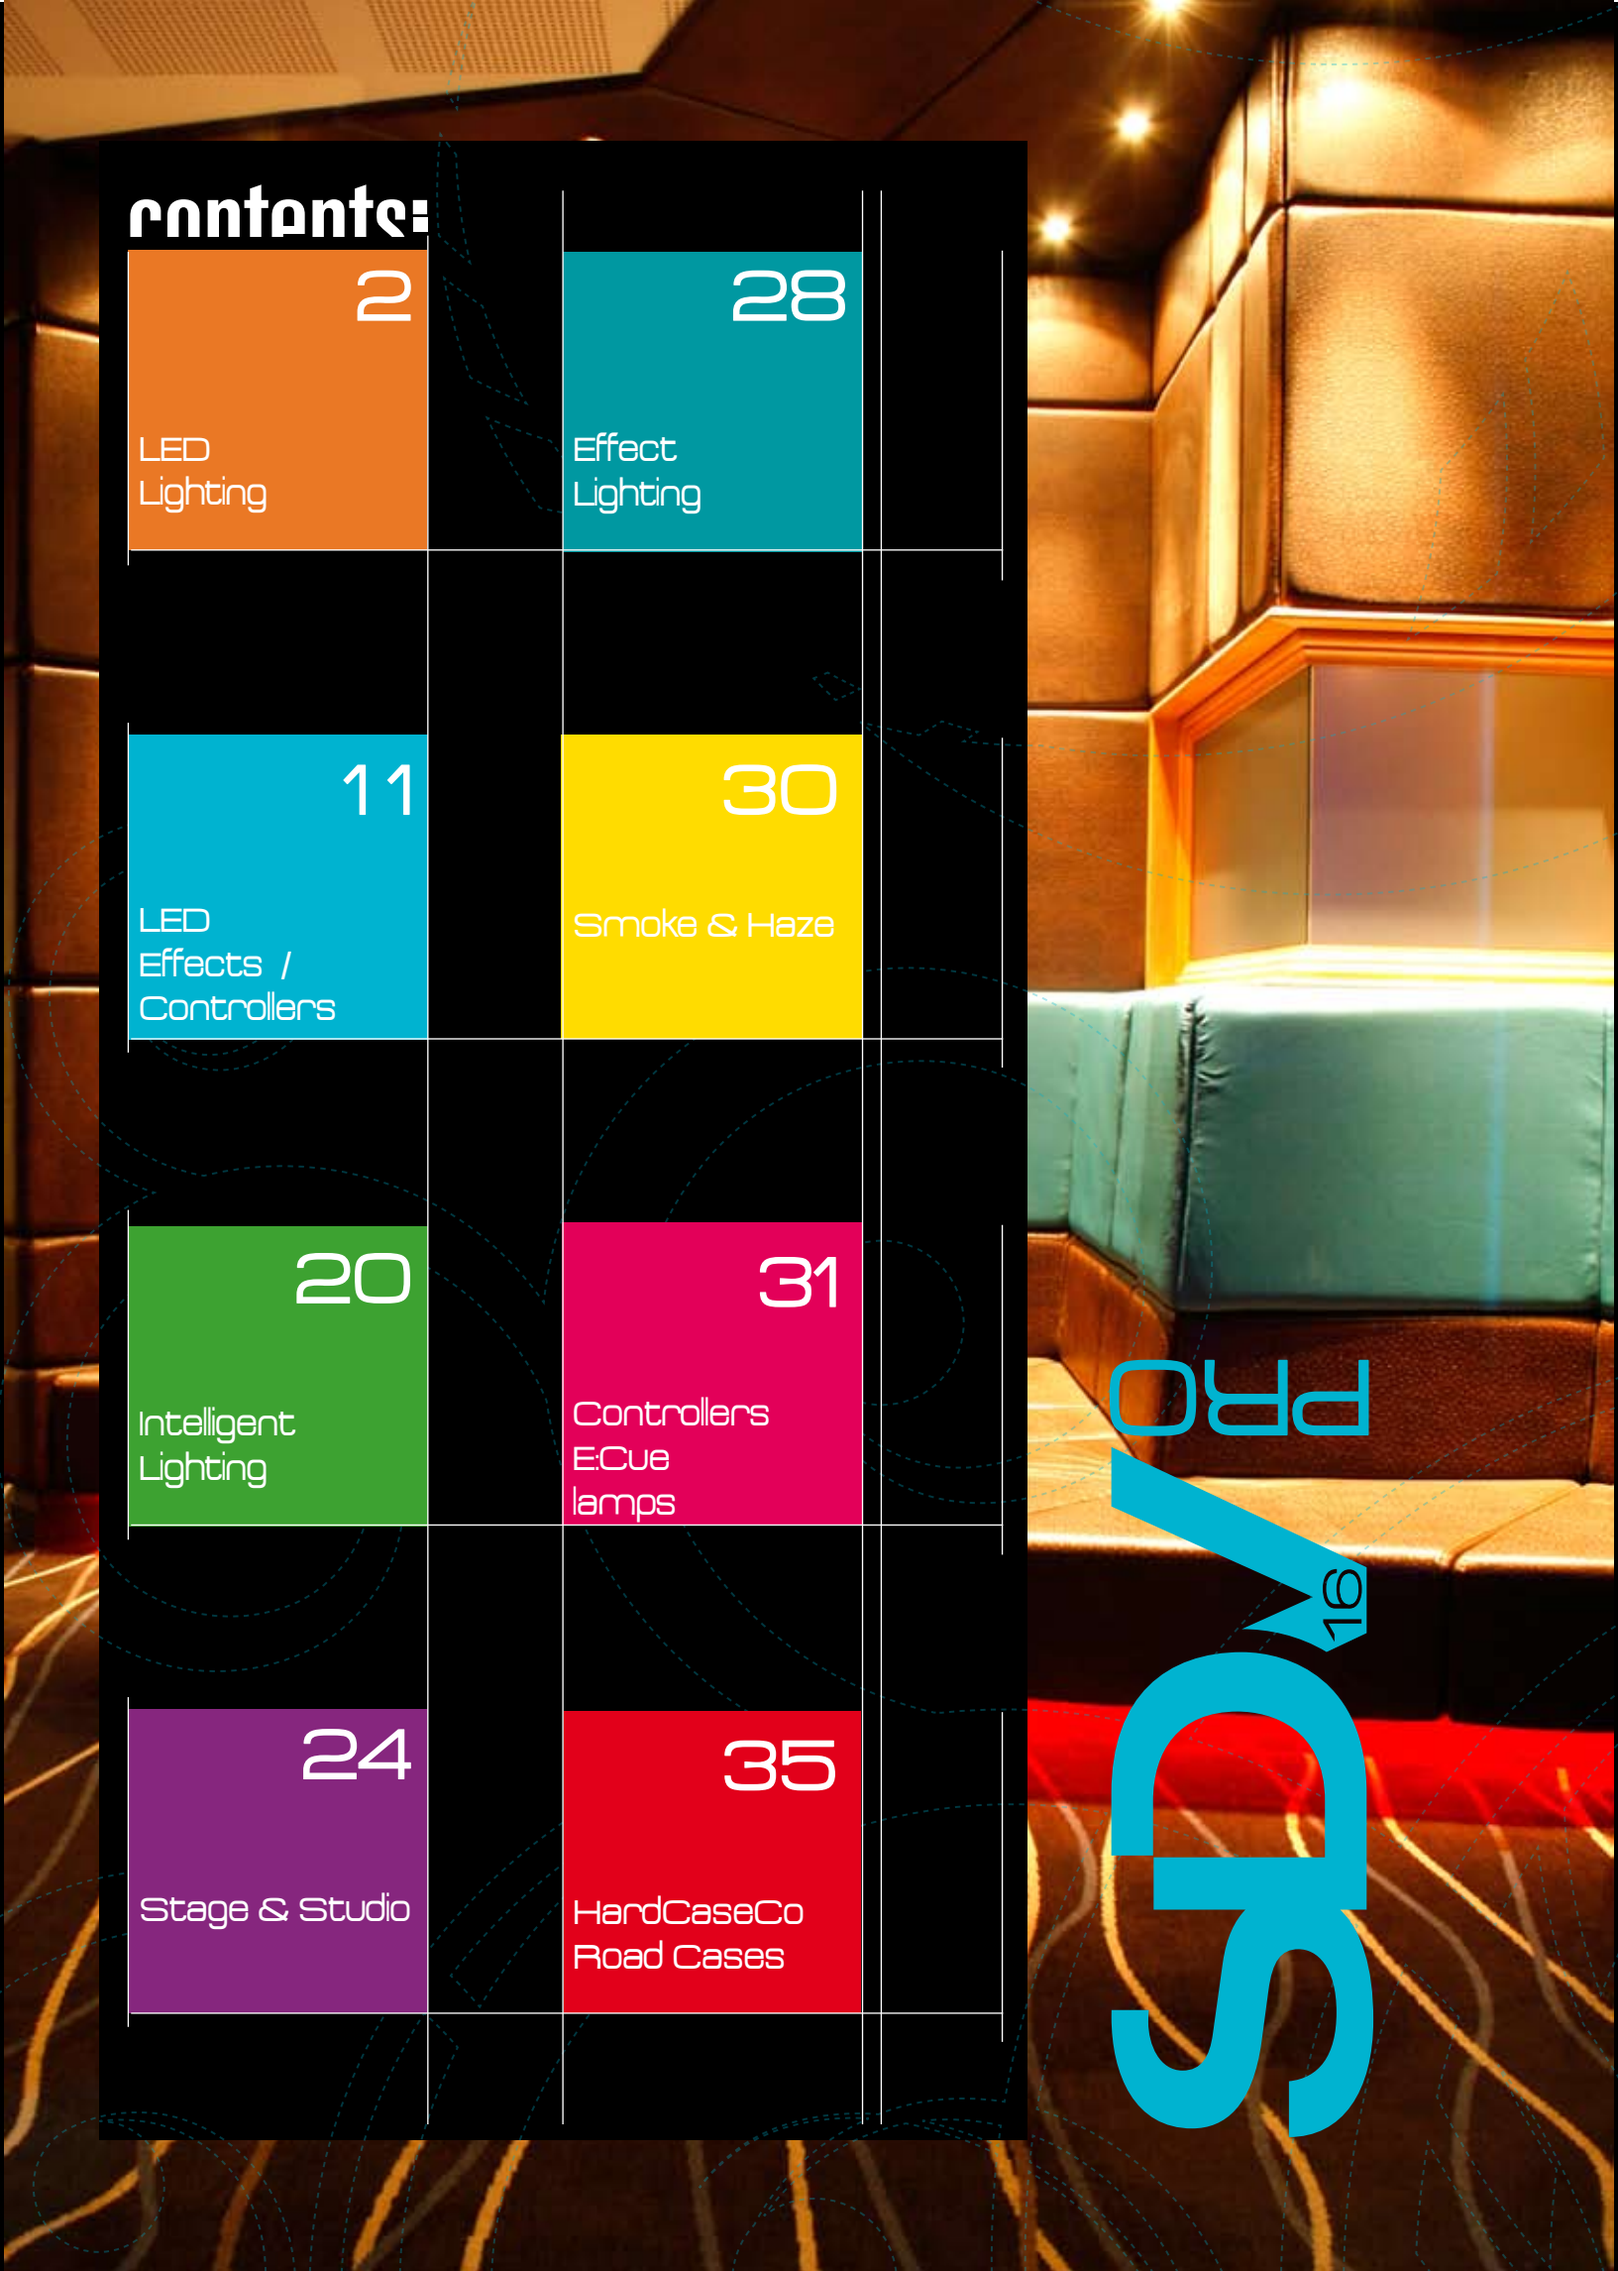

PRO SPOT 16

NEW RELEASES

ColorBar 12TC

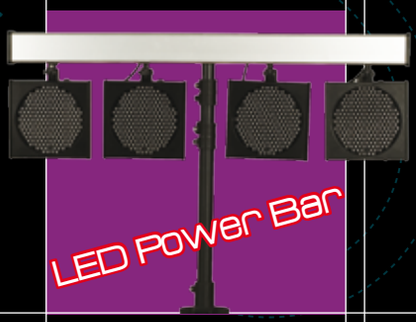

LED Power Bar

LED Source 48

InvincibLED 10W

Rage LED

Matrix 4 LED

Stage Wash 54

Theatre Spot

COMINGSOON

TriColorPar

Light & Easy

LED Centrelight

LED PAR 64

ILED-PAR64-LP-015 Polished
ILED-PAR64-LB-015 Black

LED Parcans bring a modern twist to the industry standard Parcan. The Parcan is DMX controllable with a XLR 3 pin in and out, located on the rear of the can. Also included is a LED display for DMX channel allocation. The Par64 RGB has 212 LEDs, with 5mm LEDs and available in either black or polished finishes.

Red

Green

Blue

Remote Commander

ILED-RC

Features remote control ability.

- Designed for use with ILED-CC and ILED-PC300.
- Choose 9 different colors by Hold Color button
- Choose 32 color mix and fade-in/fade-out by Spectrum Mix button.
- Activate the 12 pre-programmed chase patterns by Chase button
- Sound activation is available via sound option
- Designed to control LED Parcans

ParLite 18

IL-00927

The Parlite 18 is a compact LED Par delivering virtually infinite RGB color mixing options. This fixture offers full DMX control plus stand alone programmable macros. The Parlite 18 is constructed from light weight robust plastic and is suitable in various applictions from feature lighting to stage illumination.

Electrical AC240V ~ 50Hz

LED LED/Unit: 18 (6R : 12G : 12B)
Output/LED: 1W
Beam Angle: 15 degrees
Cooling: Forced air convection

Effects RGB color mixing/custom programs/strobe/dimmer/color macros/ID address/auto programs

Control Display panel/automatic/ custom/Pix Controller/Stand Alone/Slave/ DMX512: 3chs/4chs/9chs

Dimensions

Size: 205 x 157 x 207mm
Weight: 2.5Kg
Color: Black

DMX Pinspot

ILED-CP36-B-15D

The LED DMX Pinspot is a compact pinspot fixture ideal for mirror ball and table lighting. Complete with RGB LEDs for simple, effective pin spot lighting. Color change controlled remotely via DMX. Durable aluminium housing.

Power Supply: AC 240V ~ 50Hz
LEDs: 91 (R:31 G:30 B:30)
Consumption: 10W
Beam Angle: 15°
Diamentions: 101x129.5x118.4mm
Weight: 1kg

NEW PRODUCT

LED PowerBar

ILED-PARBAR-4-B

Features smart bar with 4 extremely thin LED panels - Only 38mm

Powered control bar has 9 color presets and 12 built in shows with fade.
Like 4 Par 64 LED Pars in one convenient Par Bar.
This innovative, compact system makes setup quick and easy.

- DMX channels 4/ 13/ 16
- 3 operation modes: DMX, Master/Slave, and sound activation
- Optional CA-8 controls for instant lighting shows at your fingertips or by foot.
- The pack works with LED commander for fixed color, chases, spectrum mix, etc.
- 9 presets color, great 12 sound controllable shows and 1 fade performance. The speed of show and fade is adjustable.
- LED Panels are individually adjustable so light can be directed as desired

PACKAGE INCLUDES
- 4 x LED Panels
- 1 x 10m DMX Signal Cable
- 1 x 5m Power supply cable
- 1 x Stand Adaptor

ISPS-502- Stand Sold Separately

Power supply: 240V - 50Hz
LED Beam Angle: 15°
Power Consumption: 67W
LED: R 70, G 71, B 71 (total 212 pcs)
Size: 1060x67x88mm
Weight: 9.2kgs

NEW PRODUCT

Light & Easy Controller

ILED-0408

The Light and Easy Controller can control 8 groups of lighting fixtures, each with 4 channels

Features
- 8 buttons for separate control
- Digital LED display panel
- 8 button presets - by using the up and down buttons set up to 32 presets
- 8 button chases - by using the up and down buttons set up to 32 presets
- When CHASE is running, adjust speed and fade from the related fader
- Sound activation and independent Black out Button
- Strobe button - Strobe speed is adjustable from 1HZ to 20HZ
- 4 Channel Value (0-255) control, adjusted by faders

Power Input: DC9 - 12V 800mA
Size: 280x170x75mm
Weight: 1.5kgs

NEW PRODUCT

TriColor MultiPar 3W

SPECIFICATION

Power input: AC 240V - 50Hz
LEDS: 21PCS RGB 3W tri-color 3pcs in one
Beam angle: 44 degree
4 digit LED display
8 built in programs
strobe effect - 1-25 flashes per second
dimming and blackout for all 3 colors
3 DMX channel modes: 3/4/6
Weight: 5kg
Size: 38×30×30cm

COMING SOON

MultiPar TC

SPECIFICATION

Power input: AC 240V, 50Hz
Wattage: 80W
LEDS: 18PCS RGB 3W tri-color 3pcs in one
Beam angle: 40 degree
3PIN XLR
Built-in microphone
Weight: 6.7kg
Size: 30×27×22cm

AVAILABLE AUGUST 09

LED Source 48

RGB 15° - IL-05083
RGB 30° - IL-05090
WHITE 15° - IL-05250
WHITE 30° - IL-05267

The LED Source 48 brings a fresh twist to standard wash applications. Available in 2 models, the RGB model consists of 48 3W LEDs – 12Red, 12 Green, 12 Blue, 12White. The Warm White model consists of 48 3W LEDs – 12 Cool White and 36 Warm White. RGB color mixing provides almost unlimited color range as well as white light. Each unit is DMX controllable with on board auto-programs and custom-program abilities. Other functions include strobe, dimmer and auto-status sensing.
(barndoors sold separately)

LS-48-RGB

Electrical	AC240V ~ 50Hz
	IP Rating: IP67
LED	LED/Unit: 48pcs x 3W (12R : 12G : 12B : 12W)
	Beam Angle: 15/30 degrees
	Cooling: Direct air convection
Effects	RGB color mixing/custom programs/strobe/dimmer/color macros/ID address/auto programs/ Custom Programs/ RGB to White/ RGB Calibration
Control	Display panel/automatic/DMX512: 3chs/4chs/10chs/12chs
Dimensions	Size: 305 x 276 x 230mm
	Weight: 8.5Kg
	Color: Black/Silver

LS-48WW

Electrical	AC240V ~ 50Hz
	IP Rating: IP67
LED	LED/Unit: 48pcs x 3W (12CW : 36WW)
	Beam Angle: 15/30 degrees
	Cooling: Direct air convection
Effects	WA color mixing/strobe/dimmer/ID address/ WB Calibration
Control	Display panel/automatic/DMX512: 3chs/4chs
Dimensions	Size: 305 x 276 x 230mm
	Weight: 8.5Kg
	Color: Black/Silver

The IP LED Source 36 is suitable for both interior and exterior wash applications. RGB color mixing provides virtually unlimited color range. Each unit is DMX controllable with on board auto-programmers and custom-program abilities. Other functions include strobe, dimmer and auto-status sensing.

IP LED Source 36

iL-07506(silver 15°)
iL-07513(black 15°)

ELECTRICAL	Voltage AC240V – 50Hz
	IP Rating: IP65
	Rated Power: 65W
LED	LED/Unit: 36pcs (R12:G12:B12)
DMX CHANNELS	9 Channels
DIMENSIONS	Size: 235 x 165 x 300mm
	Weight: 5Kg
OPTICS	15°(Standard), 30°

ColorBank 54

IL-06813

The ColorBank 54 provides a bright output ideal for all wash applications on stage and in the nightclub. Grouped or individual control of the LED modules makes this fixture a great tool for any light show and with specialized ID addressing it is possible to separately control up to 66 different fixtures from one DMX channel.

The IP65 rated weather-proof casing means that this fixture is also designed to meet the requirements of a wide range of outdoor architectural applications.

Electrical:	240V 50Hz | IP Rating: IP 66Rated | Power: 80W
LED:	LED: 54pcs (18R : 18G : 18B) | Output/LED: 1W | Beam Angle: 15°, Optional 30°
	Cooling: Direct air convection
Effects:	RGB color mixing/ Auto-programs/Strobe/ Dimmer/
	Auto DMX Addressing(ADAS)/ ID address
Control:	DMX512/ Display Panel/ Automatic/ Pix Controller
	DMX512 Mode: 12CHS
Size:	570 x 210 x 190mm
Weight:	8.2Kg
Color:	Black

LED Bank H.O

IL-00873

A high powered version of the popular ColorBank 54, this fixture can be used in multiple applications. This IP65 rated fixture is also suited for all weather outdoor use.

Consisting of 108 1W LEDs – 36 Red, 36 Green, and 36 Blue - the LEDBank H•O features 15° optics and delivers a beam angle of 17° x 12°. On board automated programs can be operated via master/slave or DMX operation. Up to 28 units of this fixture can be linked for ease of use.

Electrical:	240V 50Hz
	IP Rating: IP65
	Rated Power: 135W
LED	LED: 108pcs (36R : 36G : 36B), Output/LED: 1W, LED Beam Angle: 15°, optional 30°
	Beam angle: 17° x 12° (15° lenses), Field angle: 30° x 24° (15° lenses)
	Lux: 23,457 (15° lenses), Cooling: Direct air convection
Effects:	RGB color mixing/ Auto-programs/Strobe/ Dimmer/
	Auto DMX Addressing/ ID address/Color Macros
Control:	DMX512/ Display Panel/ Automatic/ Pix Controller
	DMX512 Mode: 12CHS
Size:	570x220x190mm
Weight:	13kg

ColorBloc 48

IL-00880

The ColorBloc 48 is a high powered LED wash fixture designed for a wide range of applications including theatre, architecture, installation and live production. The IP65 rated weather-proof housing means that this fixture is also designed to meet the requirements of outdoor architectural applications.
The unit ColorBloc 48 also features a unique 'Hyper-Color' setting that allows the LEDs to be driven at a higher current for increased output.
On board programs can be operated via master/slave or DMX operation.
The ColorBloc 48 fixture includes 12 Red, 14 Green, 12 Blue and 10 White LEDs.

Electrical:	240V 50Hz
	IP Rating: IP65
	Rated Power: 165W
LED:	LED/Unit: 48 (12 red, 14 green, 12 blue, 10 x white)
	Beam Angle: 10°/15°/30° (15° lenses installed - 30° lenses optional)
	Cooling: Direct air convection
Effects:	RGB color mixing/auto programs/strobe/dimmer/auto DMX addressing (ADAS)/
	ID address/ Remote Address System(RAS)
Control:	DMX512/Display Panel/Automatic/Pix Controller
	DMX512 Mode: 3CHS/ 4CHS/ 5CHS/9CHS
Size:	380 x 200 x 190mm
Weight:	8Kg
Color:	Black (standard) /Silver/White

NEW PRODUCT

ColorBar 12TC

ILED-BD12TC-025
ILED-BD12TC-040

The ColorBar-12TC is a vibrant linear LED fixture comprising of 12 x 3W Tri-Color LEDs in clusters of four individually controlled cells. Its modular design makes it ideal for an array of lighting applications , from cyc illumination to pixilation and other visual effects.

The ColorBar-12TC that can be operated via DMX as well as stand alone/master slave. Its compact and Modular design, enables this fixture to be linked together in multiple units with in and out data and power to create a large single pixel line effect or array.

Electrical:	Voltage: 240V ~ 50Hz | Rated Power: 40W
LED:	Total LED: 12 X 3W Tri-Color LED 50, 000 hrs rated lifespan (Avg) Beam Angle: 25°/40°
Effects:	RGB Mixing/Auto-programs/Custom programs/All effects and programs activated by DMX/4 LED Zones, can change separately
Control:	DMX512/LCD Display Panel/Automatic Stand alone/Slave
Size:	324x95x178mm
Weight:	3.9Kg
Color:	Black

LEDLine 24

IL-00910

The LED Line 24 is a dynamic LED fixture utilizing 24 1W LEDs in four individually controlled sections making it ideal for cyc washing, pixel mapping and other visual effects.

The LED Line 24 features on board pixel effect macros that can be operated via master/slave or DMX operation. Modular in design, this fixture can be linked together in multiple units and daisy chained for data and power to create a large single pixel line effect.

Electrical:	240V 50Hz Rated Power: 45W
LED:	Total LED: R:8 G:8 B:8 Output/LED: 1W Beam Angle: 15°, Optional 10° or 30° Cooling: Direct air convection
Effects:	RGB color mixing/Custom programs/Auto-programs/Strobe/Dimmer/Pixel effect/Color macros/Fan speed control/ ID address
Control:	DMX512/ Display Panel/ Automatic/ Pix Controller DMX512 Mode: 12CHS
Size:	434 x 138 x 127.5mm
Weight:	3.2Kg
Color:	Black

StageLED 45

IL-00897

The Stage LED 45 is a high powered LED fixture designed for many applications including theatre, architecture, installation, exhibition and live production. With full DMX functionality including color mixing, strobe control and dimming, the Stage LED 45 can be used as a RGB wash, color changing effect light and pixel line fixture.
Consisting of 45 1W LEDs – 15 Red, 15 Green and 15 Blue – the Stage LED 45 features standard 15° optics with the option of 10° and 30° optics. Operates via full DMX control as well as master/slave or stand alone.

Electrical:	240V 50Hz | Rated Power: 85W
LED:	Output/LED: 1W | LED/Unit: 45pcs (15R : 15G : 15B) LED Beam Angle: 15°, optional 10° or 30° | Cooling: Direct air convection
Effects:	RGB color mixing/Auto-program/Custom program/ Strobe/Dimmer/Fan speed control/Pixel effect/Color macros/ID address
Control:	Display Panel/ Automatic/ Pix Controller DMX512 (12CHS)
Size:	426x295x306mm
Weight:	6kg
Color:	Black

Building Wash 108P

BW - 108P AW
BW - 108P RGBA

NEW PRODUCT

Building Wash 108P is a heavy duty and powerful LED projector based on 108 high powered LED's. Available in RGBA or Amber White combinations, and two beam angle variations.

DMX Channels: BW-108P AW: 2/2 Ch.
BW- 108P RBGA: 7/5/4 Ch.

·Waterproof LED touch control panel with password protection
·Built-in programs (16 Chases) and 3 editable chases
·IP 66 housing, suitable for a wide range of exterior or interior applications.
·Completely silent, the projector is cooled by natural air convection (not fan)
·400Hz LED refresh rate makes BW-108P also suitable for TV Studios
·The heavy duty aluminium housing with bracket, for floor mounting or hanging

Power Supply: AC 240V 50Hz
Power Consumption: BW-108: 150W
LED: BW-108P AW: 108 x 1 W LEDs, Amber 36, Cool White: 72
BW-108P RGBA: 108 x 1W LEDs, Amber 27, R27, G27, B27
Beam Angle: 25° or 30° x 65°
Size: 582 x 325 x 251 mm
Weight: 18.4kgs

DISTANCE M		2	4	6	10	15	
WHITE	15°	8240	2840	1391	447	156.8	lux
	25°	5600	1740	845	242	89.3	
	45°	4020	1135	532	153.7	71.3	
BLUE	15°	850	302	142	39	14.8	lux
	25°	608	189	87	21.2	11.3	
	45°	407	121	57	14	7.1	
GREEN	15°	5200	1820	911	265	97	lux
	25°	3620	1120	548	148.5	61.8	
	45°	2660	750	350	96.6	43.2	
RED	15°	2050	720	356	137.2	52	lux
	25°	1710	520	257	60.6	30.8	
	45°	1036	293	137	50.4	22.8	

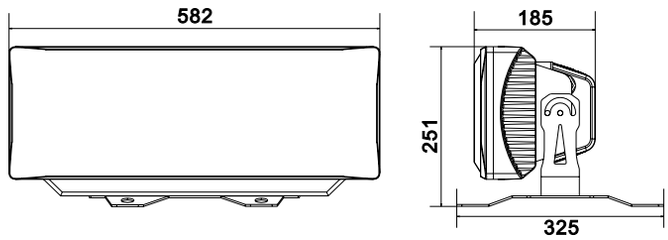

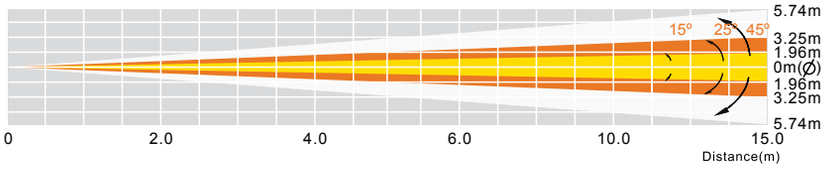

Color Fusion

ICF-805

The ColorFusion 805 is a RGB Pixel LED effect incorporating 384 5mm RGB LEDs. DMX 512 control (6, 9, 15, 24, 27, Channel). Switchable between DMX control & automatic stand alone mode. Built in effect macros for instant shows.

Speed settings of fade times on built in shows are adjustable. Sound sensitivity adjustment available in stand alone mode.

Electrical:	Voltage: 240V ~ 50Hz
	Rated Power: 40W
LED	Total LED: R-128, G-128, B-128
	Beam Angle: 40°
Effects:	RGB Mixing/Auto-programs/Custom programs/All effects and programs activated by DMX/4 LED Zones, can change separately
Control	DMX512/Automatic Stand alone/Slave
Size:	965x64x152.5mm
Weight:	2.5Kg
Color:	Black

SPECIFICATION:
Power Supply: 240v ~ 50Hz
Power Consumption: 18W
LED/Unit: 192
(R: 64 G: 64 B: 64)
Size: 315.4 x 181 x 114.7mm
Weight: 2.1kg



LED Strobe RGB

ILED-192RGB

The LED Strobe RGB is a LED strobe that combines the latest color mixing technology with great built in programs.

- Fitted with 192 high output LEDs to offer powerful full color output.
- 4 DMX channels: R, G, B, Dimmer/Strobe
- 3 operational modes: DMX control, Sound Activation, Master /Slave
- Built in programs under Master/Slave triggered by sound
- Full range dimming and variable strobe speeds
- Optional CA-8 controller
- 4 Digit LED navigation panel

SPECIFICATION:
Power Supply: 240v ~ 50Hz
Power Consumption: 20W
LED/Unit: 192 White LEDs
Size: 315.4 x 181 x 114.7mm
Weight: 2.1kg



LED Strobe WHITE

ILED-192W

The LED Strobe White is a LED strobe that combines the latest color mixing technology with great built in programs.

- Fitted with 192 high output white LEDs to offer powerful full color output.
- 1 DMX channels: Dimmer/Strobe
- 3 operational modes: DMX control, Sound Activation, Master /Slave
- Built in programs under Master/Slave triggered by sound
- Full range dimming and variable strobe speeds
- Optional CA-8 controller
- 4 Digit LED navigation panel

Splender 90

ILED-CM-90 AW
ILED-CM-90 RGBW

NEW PRODUCT

The Splender 90 is a lightweight, compact wash light producing brilliant powerful colors. Splender 90 consists of 90 pcs of 3W LED. Excellent color mixing, durable design, perfect for stage wash applications where real lighting punch is required.

WHITE

Electrical:	Voltage: 240V ~ 50Hz Rated Power: 300W
LED:	Total LED: 90 x 3W LEDs, Amber 30,CW60 50, 000 hrs rated lifespan Beam Angle: 15°/25°
Effects:	RGB Mixing/Auto-programs/Custom programs/All effects and programs activated by DMX
Control:	DMX512/LCD Display Panel/Automatic Stand alone/Slave
Size:	335x227x386mm
Weight:	10Kg
Color:	Black

RGBW

Electrical:	Voltage: 240V ~ 50Hz Rated Power: 300W
LED:	Total LED: 90 x 3W LEDs, R 18, G 24, B 24, W 24 50, 000 hrs rated lifespan Beam Angle: 25°
Effects:	RGB Mixing/Auto-programs/Custom programs/All effects and programs activated by DMX
Control:	DMX512/LCD Display Panel/AutomaticStand alone/Slave
Size:	335x227x386mm
Weight:	10Kg
Color:	Black

Stage Wash 54

IL-05182

Compact and high performance LED based moving wash light. Features 54 Luxeon K2 LEDs, electronic strobe, electronic dimmer, easy setup via LCD display panel and more...

Electrical:	Voltage: 240V ~ 50Hz Rated Power: 280W
LED:	Total LED: 54 pcs - (14R x 2W, 14G x 3W, 14B x 3W, 12W x 3W) Beam Angle: 15°/30°
Effects:	RGB color mixing/Auto-programs/Custom programs/ Strobe/Dimmer/Fan Speed control Auto color sequence (variable speed) All effects and programs activated by DMX
Control:	DMX512/LCD Display Panel/Automatic Stand alone/Slave
Pan/Tilt:	Pan: 540° Tilt: 250° Pan/Tilt speed Pan/Tilt Blackout
Size:	390x320x385mm
Weight:	16.8Kg
Color:	Black

LED logo Projector 20W

ILED-LGP-20CRL

NEW PRODUCT

- 240V - 50Hz
- Gobo - E Size
- Light Source - LED 20W
- Color Temperature - 7000K
- LED lifespan - 30000 hrs (Avg)

With high output 20W LED,
3 gobo rotation speeds in either clock-wise or anti clockwise direction plus gobo flash function this attractive logo projector is sure to be a head turne
Accepts any E Size gobo or image.

LED logo Projector 45W SL

ILED-LGP-45SL

NEW PRODUCT

- 240V - 50Hz
- Gobo - E Size
- Light Source - LED 45W
- Color Temperature - 7000K
- LED lifespan - 30000 hrs (Avg)
- Slide Size - 2.5"/2"

Very High output 45W LED,
3 gobo rotation speeds in either clock-wise or anti-clockwise direction plus gobo flash function this logo projector will get the message across. Accepts any E Size gobo or image.

LED logo Projector 20W IP

ILED-LGP-45IPL

NEW PRODUCT

- 240V - 50Hz
- Gobo - E Size
- Light Source - LED45W
- Color Temperature - 7000K
- LED lifespan - 30000 hrs (Avg)
- IP54

For outdoor image projection applications this very High output 45W LED has
3 gobo rotation speeds in either clock-wise or anti-clockwise direction plus gobo flash function. This logo projector is a new way for displaying a message, theme or image.
Accepts any E Size gobo or image.

Radiant LED

ILED-340B

DMX 512 | SOUND ACTIVATION | PRE-PROGRAMMED | MASTER/SLAVE OPERATION

NEW PRODUCT

- Featuring the 1 x 10W Tri-color high powered LED and specially designed mechanism, the radiant LED shoots tons of powerful and laser-like multi color beams, covering an entire room with amazing effects.
- 3 DMX Channels: dimmer/strobe, color, rotation
- 3 control modes: DMX, Master /Slave, and sound Active
- Great built-in lighting shows under Master/Slave operation triggered by music
- Full range dimmer and variable strobe effects
- Optional CA-8 easy controller for instant lighting shows at your fingertips
- LED display for easy navigation

Power Supply:	240V - 50Hz
Power Consumption:	26W
LED:	1 x 10W Tri-color LED, 30,000 hrs rated (Avg)
Size:	302x236x212mm
Weight:	4.8 Kg

Rage LED

ILED-3084

DMX 512 | SOUND ACTIVATION | PRE-PROGRAMMED | MASTER/SLAVE OPERATION

NEW PRODUCT

- Featuring the 2 x 10W Tri-color, the DMX Rage LED will fill an entire room with powerful and laser-like multicolor beams, creating great effects
- 3 DMX Channels: dimmer/strobe, color, rotation
- 3 control modes: DMX, Master /Slave, and sound Active
- Great built-in lighting shows under Master/Slave operation triggered by music
- Full range dimmer and variable strobe effects
- Optional CA-8 easy controller for instant lighting shows at your fingertips
- LED display for easy navigation

Power Supply:	240V - 50Hz
Power Consumption:	39W
LED:	2 x 10W Tri-color LED, 30,000 hrs rated (Avg)
Size:	269x271x140mm
Weight:	4.1 Kg

Matrix LED

ILED-7871

DMX 512 | SOUND ACTIVATION | PRE-PROGRAMMED | MASTER/SLAVE OPERATION

NEW PRODUCT

- Featuring 256 high bright LEDs. Each LED is individually controllable, the matrix LED delivers great text patterns, geometric figures, dynamic scanning, rolling, rotating and Zooming effects.
- DMX 8 and 256 channels selectable :
  8-ch Mode: Strobe, character/logo/macro, color, rotate, pattern direction horizontal, pattern direction vertical, zoom 256-ch. mode: individual LED control
- 3 operational modes: DMX, Master /Slave, and sound Active
- Great built-in lighting shows under Master/Slave operation triggered by music
- Optional CA-8 easy controller for instant lighting shows at your fingertips
- LED display for easy navigation

Power Supply:	240V - 50Hz
Power Consumption:	36W
LED:	R64, G64, B64, W64 - (Total - 256pcs)
Size:	242x270x215mm
Weight:	4.0 Kg

Matrix 4 LED

ILED-7874

DMX 512 | SOUND ACTIVATION | PRE-PROGRAMMED | MASTER/SLAVE OPERATION

NEW PRODUCT

- The Matrix LED features 4 high brightness red, green, blue and white LED clusters, creating great text patterns, geometric figures, dynamic scanning, rolling and rotating effects.
- DMX 8 and 256 channels selectable :
  8-ch Mode: Strobe, character/logo/macro, color, rotate, pattern direction horizontal, pattern direction vertical, zoom 256-ch. mode: individual LED control
- 3 operational modes: DMX, Master /Slave, and sound Active
- Great built-in lighting shows under Master/Slave operation triggered by music
- Optional CA-8 easy controller for instant lighting shows at your fingertips
- LED display for easy navigation

Power Supply:	240V - 50Hz
Power Consumption:	35W
LED:	R64, G64, B64, W64 - (Total - 256pcs)
Size:	971x217x121mm
Weight:	6.0 Kg

StyLED

ILED-7474



NEW PRODUCT

- Featuring 4 LED clusters & great programs, StyLED rocks the crowds with its dynamic scanning effects and powerful beams
- DMX 6 - Channel: chase, strobe, red, green, blue, dimmer
- 3 control modes: DMX, Master /Slave, and sound Active
- Great built-in lighting shows under Master/Slave operation triggered by music
- Low heat, low power consumption
- DIP-switch for setting DMX address

Power Supply:	240V - 50Hz
Power Consumption:	11W
LED:	R96, G96, B64 (Total 256) rated 100,000hrs (Avg)
Size:	965x190x82mm
Weight:	6 Kg

LED Centrelight

ILED-CTL-6



NEW PRODUCT

- The LED Centrelight is lightweight and compact in size. It features the latest LED technology, with 6 x 3W Tri-color LEDs, power output is similar to a discharge lamp visually, delivering ultra smooth, dynamic movements and powerful outputs.
- 4 DMX channels: movement, movement speed, colour macro, colour macro speed
- 12pcs stepping motors drive 12 reflectors, each reflector can turn from 0-180°
- 3 control modes: DMX, Master /Slave, and sound Active
- Great built-in lighting shows under Master/Slave operation triggered by music
- Optional CA-8 easy controller (sold separately) in Master/Slave operation with 3 different functions
- Easy installation on ceilings by strong hanging bracket
- Fan cooled & big heat-sink for excellent ventilation

Power Supply:	240V - 50Hz
Bulb:	6 x LED 3W Tri-Color, 50,000 hrs rated (Avg)
Size:	414x478x152mm
Weight:	10.4 Kg

InvincibLED 10W

ILED-767-10W

DMX 512 | SOUND ACTIVATION | MASTER/SLAVE OPERATION

SPECIFICATION:
Power supply: 240V~50Hz
Power consumption: 23W
Bulb: 10W RGB LED (3in1)
30,000 hrs rated (Avg)
Size: 172 x 215 x 195mm
Weight: 3.3kg

NEW PRODUCT

InvincibLED is a powerful LED effect featuring the latest 10W RGB LED technology, with specially designed rotating discs to deliver sharp, high output effects.

- 3 DMX channels: Dimmer/Strobe, Color, Rotation
- Great built-in lighting shows under Master/Slave and Sound Activation
- Full range dimmer and variable strobe effects
- Optional CA-8 controller
- DIP-switch for DMX addressing
- Big heat sink for excellent ventilation to extend LED life
- Ideal for discos, night clubs, bars, parties and other events

MarveLED

ILED-737

DMX 512 | SOUND ACTIVATION | PRE-PROGRAMMED | MASTER/SLAVE OPERATION

SPECIFICATION:
Power supply: 240V ~ 50Hz
LED: R: 36 G: 36 B: 36 W:36
Size: 270x240x213mm
Weight: 4.2kg

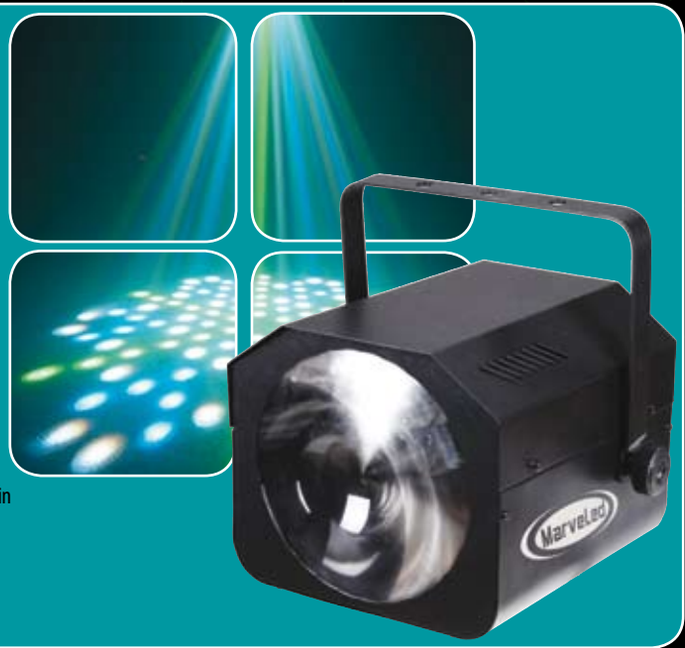

Marvelous DMX controlled LED moonflower effect. This unit operates via Sound Activation or via DMX. Occupies 4 DMX channels and features sharp red, green, blue and white beams.

- A wide beam angle of 400 enables this effect to cover a large area.
- Great built in lighting shows under master/slave mode triggered by music
- 3 operation modes: DMX, Master/Slave, and Sound Activation
- Optional CA-8 controller for enjoying instant lighting shows at your fingertips
- Strobe and 0-100% dimming functions
- LED operational display and additional IEC power output for linking other units together in a daisy chain
- Advanced LED technology. Long lifespan LEDs (rated average 100,000hrs)
- Low heat, low power consumption, no duty cycle, runs all night
- Ideal for discos, clubs, pubs, parties and mobile DJ's

ImpossibLED

ILED-777

DMX 512 | SOUND ACTIVATION | PRE-PROGRAMMED | MASTER/SLAVE OPERATION

SPECIFICATION:
Power supply: 240V ~ 50Hz
LED: R: 140 G: 105 B: 84 W: 63
Size: 250x250x280mm
Weight: 5kg

The ImpossibLED is a high powered LED effect light creating a splendid and eye catching moon flower effect. This unit operates under Sound Activation or DMX control. Occupying 10 DMX channels with bright Red, Green, Blue and White beams.

- Specifically designed 7 LED clusters, with wide beam angle (54˚), covers a large area.
- Impressive built in lighting shows under Master/Slave mode which are triggered by music.
- 3 operation modes: DMX, Master/Slave, and Sound Activation.
- Optional CA-8 easy controller for enjoying instant lighting shows at your fingertips.
- Strobe and 0-100% dimming functions.
- Additional IEC power output for linking multiple units together in a daisy chain format.
- Advanced LED technology. Long lifespan LEDs (rated average 100,000hrs) – no need to change lamp.
- Low heat, low power consumption, no duty cycle, runs all night.
- Ideal for discos, clubs, pubs, parties and mobile DJ's.

LED Jive

ILED-245-II

Power Supply: 240V~50Hz
Power Consumption: 17W
LEDs: R32, G30, B30
Size: 244 x 278 x 154mm
Weight: 3.12kgs

NEW PRODUCT

- Dual rotating moonflower effect
- LED dual lens effects with sharp red, green and blue high output color beams
- Wide beam spread that covers a large area
- Sound active with built in programs
- High output with new superior optical system
- Very low power consumption, no duty cycle

SuperNova White

ILED-920D

The SuperNova utilizes a single 3 Watt high powered LED as its light source, producing laser like powerful beams of light.

- Unit occupies 2 DMX channels in DMX mode
- Built in lighting shows triggered by music, when operating in Sound Activation mode
- 3 Operation Modes: DMX, Master/Slave, and Sound Activation
- Optional CA8 controller for instant lighting shows
- Advanced LED technology creating powerful light output comparable to a discharge lamp
- Low heat, low power consumption, no duty cycle for continuous operation

SPECIFICATION:
Power Supply: 240V ~ 50Hz
LED: 1 x 3W LED
Size: 205.5x141x127mm
Weight: 1Kg

SuperNova RGB

ILED-920D RGB

The SuperNova RGB is in an innovative edition to the SuperNova range. Utilising a 3W Tri-Color LED as its light source, the SuperNova RGB produces full color , laser like beams of light.

- 3 DMX channel: Dimmer/Strobe, Color, Rotation
- Fabulous built-in lighting shows triggered by music
- 3 Operation Modes: DMX, Master/Slave, Sound Activation
- Optional CA-8 controller for enjoying instant lighting shows at your fingertips
- Long lifespan LEDs, no need to change lamp
- Low power consumption, no duty cycle, runs all night

SPECIFICATION:
Power Supply: 240V ~ 50Hz
LED: 1 x 3W Tri-Color LED
Size: 194 x 202 x 141mm
Weight: 2.0kg

Astro

RGB: ILED-256D-RGB

WHITE: ILED-256D

RGB SPECIFICATION:
Power Supply: 240V~50Hz
LEDs: 1 x 3W (3 in 1) Full Color
Size: 210 x 210 x 178.5mm
Weight: 1.8kgs

WHITE SPECIFICATION:
Power Supply: 240V~50Hz
LEDs: 1 x 3W White
Size: 210 x 210 x 178.5mm
Weight: 1.8kgs

The Astro is an innovative DMX LED star ball with 34 clear lenses to project 34 sharp beams on the dance floor creating a mirrorball like effect.

- 3 DMX channels: Dimmer/Strobe, Color, Rotation
- Great built-in lighting shows triggered by music
- 3 operation modes: DMX, Master/Slave, and Sound Activation
- Rotation speed and strobe speed adjustable via dip switch
- Employs RGB color mixing technology with creative design
- No need to change lamp, no maintenance cost
- Low heat, low power consumption, no duty cycle
- With unique features ideal for discos, clubs, pubs, parties, and mobile DJ's.

LED Drape

IL-06950 RGB

RGB LED star effect theatrical curtain.
Designed for all applications from theming to production.

6x4m black drape. Fire retardant,
Total of 128 LED's per drape.

Features include- Control via DMX512 system controller required. Allows the units to be controlled from any DMX512 controller. Powerful internal programs and simple to program user-programs allows this product to meet the needs of a variety of lighting projects and events.

SPECIFICATION:

Electrical	Voltage: 7.5V (via LED drape controller)
Power	60W
Effects	RGB colour mixing, Strobe, Dimmer, Auto-programs, Custom-programs
LEDpower	RGB 0.2W
LED/Drape	128pcs
Avg LED Life span	30 000-50 000 hrs.
OP Mode	DMX512 (10/24CHS)
Dimensions	Size - 6000x 4000x 50mm
	Weight - 18Kg
	Colour - Black

IL-06967
LED DRAPE CONTROLLER

Controller for up to 4 LED drapes (sold separately)

Flexi LED

ILED-FLS

High Intensity, Wide viewing angle, Highly flexible, 30 LEDs per metre, supplied in 5 metre reels.
Can be cut or connected every five LEDs (140mm).

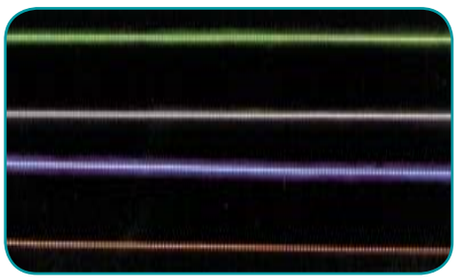

Electrical	DC 24V Power Dissipation: 1.44W Per Meter Input Current: 60mA Operation Temperature: -20 - 60º
LED	LEDs: 600LEDs per 5m length
Effects	Dimmable by pulse modulation (PWM) with the electronic controller
Control	Single Color - ILED-PSU-100-24 50W- ILED-HC-050 100W - ILED-HC-101
Applications	Channel letters, Indoor Decoration Lighting, Advertising Signs. Replacement for Neon, Ideal for indoor usage at bars, clubs, hotels, restaurants, casinos, etc. Outdoor usage options include - path & contour marking, illuminated, signs, walkways
Dimensions	Size: 5m per reel Weight: 0.9 Kg per 5m
Color	Available in Red, Yellow, Green, Blue, Cool White, Warm White.

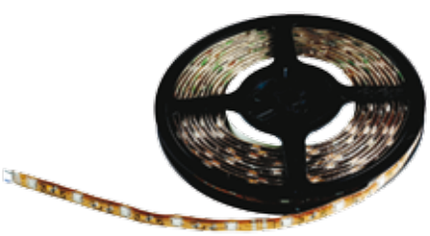

Color Tube

ICT-020
ICT-050
ICT-100

The Color Tube is available in various tube lengths of 200, 300, 500 and 1000mm. It is rated at 100,000 hrs life span and has a beam angle of 60° and 170°

Input: DC 24V
LEDs: high brightness LEDs
Colors: RGB - 200, 500, 1000mm | Blue - 300, 1000mm | Cool White - 300, 1000mm
Dimension: dia. 30 mm

	ICT 20 ICT 20S	ICT 30	ICT 50 ICT 50S	ICT 100 ICT 100S
Consumption	3W	4W	5W	10W
LEDs	24	42	72	144

Color Strip

ICT-020S
ICT-050S
ICT-100S



Input: DC 24V
LEDs: high brightness LEDs
Colors: RGB - 200, 500, 1000mm
Dimension: dia. 30 mm

Control with LED PC 100 or LED PC 300

Power Commander 100

ILED-PC100

- Power supply for ColorTube or ColorStrip
- Can be controlled by DMX controller
- Stand Alone or Master/ Slave operation with built in lighting programs
- DIP switch for DMX address and built in program setting
- Maximum 10m of LED tube/strip
- 100W
- 240V - 50Hz

Power Commander 300

ILED-PC300

- Power supply for ColorTube or ColorStrip
- Can be controlled by DMX controller
- Stand Alone or Master/ Slave operation with built in lighting programs
- DIP switch for DMX address and built in program setting
- Maximum 30m of LED tube/strip
- 300W
- 240V - 50Hz

Remote Commander

ILED-RC

- Features remote control ability
- Choose color, chase and fade options via buttons on controller
- Sound activation available
- for use with LED Parcan and LED Colortube

LED HandiCon 50

ILED-HC-050 (50w)

- Switch power supply inside
- Controlled by any universal DMX controller
- Built in programs under master/slave mode triggered by music
- Terminals for LED-wall dimmer, provides power to wall dimmer

Power Input - 240V-50Hz
Power Output - DC 24V 50W MAX
Size - 296 x 70 x 40mm
Weight - 1kg

Installer only product

LED HandiCon 101

ILED-HC-101 (100w)

- Switch power supply inside
- Controlled by any universal DMX controller
- Built in programs under master/slave mode triggered by music
- Terminals for LED-wall dimmer, provides power to wall dimmer

Power Input - 240V-50Hz
Power Output - DC 24V 100W MAX
Size - 356 x 132 x 49mm
Weight - 1.8 kg

Installer only product

LED Wall Dimmer

ILED-WD

Power input: DC 12 V
Size: 83.8 x 83.4 x 40mm
Weight: 0.5kg

A user friendly controller, it features standard size of wall recessed switch box, perfect for mood creation in households, hotels, restaurants etc.

·4 Channels (R, G, B, Dimmer) DMX output, can control one group of 4-Channel LED lighting fixtures
·One knob of Fade/Colour selection, while the other knob for adjusting Speed/Dimmer
·Buttons (M1 & M2), each button can save one scene for instant lighting effects
·Standby Button for blackout

NEW RANGE

iMove200SR

IM-200SR-HID

SPECIFICATION:
Power supply: AC 240V~50Hz
Bulb: HID 150W
Size: 276x266x396mm
Weight 11.5kg(HID)

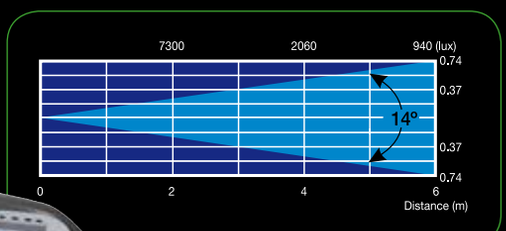

Inner View

Rotating Gobos



With its compact, stylish and excellent optics, the single yoked IM-200SR is a perfect lighting choice for discos, clubs, bars and entertainment venues. The 8 Ch. Moving spot features 11 dichroic colors, 8 rotating, interchangeable gobos, remote lamp on/off control, and automatic pan/tilt position correction. Also features a user friendly LED control panel, a switch-selectable power supply & great built-in programs. The DMX address can be set remotely by iLead controller. All of these features make the moving spot a stand out from its closest rivals.

Control:
- DMX 512 control channels: 8
- Setting and addressing: 4 digit LCD display with ON/OFF setting functions
- Data in/out: Locking 3-pin XLR

iSolution operation:
- Consistent DMX configuration enables iMove to be linked with iRock and iShow
- Remote DMX addressing (RDA): DMX address can be set remotely by iLead controller,
- Switch to Master/Slave mode automatically when DMX signal is off
- Easy installation/addressing/operation

Pre-programmed function:
- Automatic switching between sound activation and auto mode
- Master/Slave mode:
  i) No need to designate which unit is the master or slave, the first unit is always the master unit;
  ii) Built-in dynamic lighting shows for instant operation
- CA-8 Controller: Enjoy a vast range of lighting shows at your fingertips. (Sold Separately)

Pan/Tilt
- Pan: 540°; Tilt: 270°

Gobo wheel:
- 8 rotating interchangeable gobos plus white with gobo shaking effect

Color Wheel:
- 11 trapezoid dichroic colors plus white with rainbow effect in both directions

Dimmer/Shutter:
- 0 – 100 % dimmer
- Independent shutter/variable speed strobe

Optical System:
- Beam angle: 14°

Construction:
- Stylish composite housing
- Ultra-smooth, micro-stepping motors

SPECIFICATION:
Power Supply: 240V~50Hz
Lamp: NSD250/2K (GY9.5 base)
Size: 428x371x466mm
Weight: 23kg

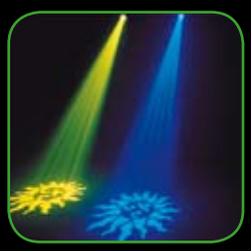

iMove250S

IM-250S-MSD

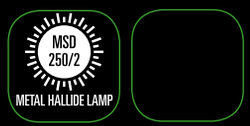

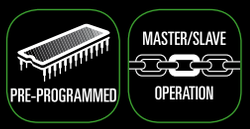

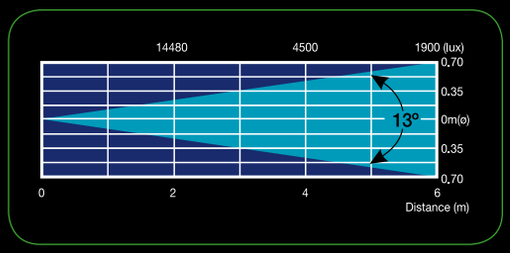

Control
- DMX512 control channels: 16 or 8 channels mode selectable, via iLead controller or any DMX controller (sold separately)
- Remote lamp on/off control (16 channel mode only)
- Thermal sensor to control the lamp ignition ensuring lamp is ignited at proper temp.
- Setting and addressing: via 4 digit blue LED display
- Display can be suppressed with on/off setting function
- Data in/out Connections: Locking 3-pin XLR

iSolution Operation
- Consistent DMX configuration enables iMove to be linked with iScan, iRock, and iShow.
- DMX address can be set remotely from an iLead controller.
- There is no need to calculate the DMX channels of each fixture in the chain when using iLead controller.
- When the DMX signal is not present, the lights will automatically switch to Master/Slave mode.
- Easy installation, easy addressing, and easy operation

Dimmer/Shutter
- 0-100% mechanical dimmer
- Independent shutter and variable speed strobe

Pan/Tilt
- Pan 540°; Tilt: 270°
- Pan/Tilt resolution: 16-bit (in 16 channel mode)
- Automatic Pan/Tilt correction
- Magnetic Pan/Tilt home positioning for easy calibration and easy maintenance

Pre-Programmed Functions
- Automatically switch between music trig or auto trig mode
- Master/Slave mode:
  - i.) No need to designate which unit is master or slave, the first unit in the chain will always act as the master unit
  - ii.) Built in lighting shows for instant operation
- User friendly CA-8 Controller (sold separately)

Gobo Wheel
- Rotating Gobo Wheel: 7 rotating, interchangeable gobos
- Gobo Wheels feature auto-home positioning for easy calibration and maintenance
- Gobo size: outside dia - 26.8mm; image dia. - 22 mm
- Gobo Shake Effect

Color Wheel
- 9 trapezoidal dichroic colors plus white
- Bi -directional rainbow effect
- Color wheel features auto-home positioning for easy calibration and maintenance

Optics
- High efficiency optical system
- High quality optical lens and dichroic colors
- Beam angle :13°

Construction
- Stylish composite housing
- Ultra-smooth, micro-stepping motors
- Integral carry handles
- Easy rigging system

Effect Wheel
- Prism
- Rotating Prism

Focus
- Remote focus by DMX

SPECIFICATION:
Power supply: AC 240V ~ 50Hz
Lamp: NSD250/2K (GY9.5 base)
Size : 360x397x503mm
Weight: 27kg (240V)

iMove250W

IM-250W-MSD

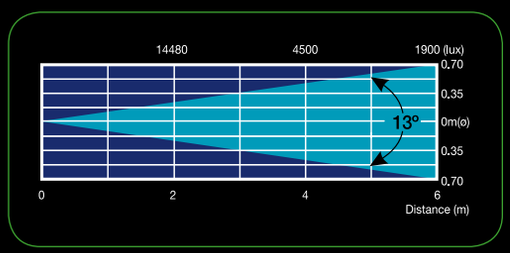

Control
- DMX 512 control channels : 16 or 8 channel user selectable modes
- Custom-designed iLead controller or by any universal DMX controller (sold separately).
- Setting and addressing : 4 digit blue LED display
- LED display with on/off setting function
- Data in/out : Locking 3-pin XLR

iSolution Operation
- Consistent DMX configuration enables iMove to be linked with iRock and iShow
- DMX address can be set remotely from the iLead controller There is no need to calculate the DMX channels of each fixture in the chain
- When there is no DMX signal, the lights will switch to Master/Slave mode automatically
- Easy installation, easy addressing, and easy operation

Pre-Programmed Function
- Automatically switch between music trig or auto trig mode
- Master/ Slave mode :
  - i.) No need to designate which unit is master or slave, the first unit in the chain will always act as the master unit
  - ii.) Built in dynamic lighting shows for instant operation

Pan/Tilt
- Pan: 540°; Tilt: 270°
- Automatic Pan/Tilt correction

CMY Color Mixing System
- Cyan: 0 ~ 100%, Magenta: 0 ~ 100%, Yellow: 0 ~ 100%

Color Wheel
- 6 trapezoidal dichroic colors plus white
- Rainbow effect in both directions

Dimmer Shutter
- 0 ~ 100% dimmer
- Independent shutter/ variable speed strobe

Optics
- High efficiency optical system
- High quality optical lens and dichroic colors
- Manually adjustable beam angle : 16° ~ 26°

Construction
- Stylish composite housing
- With ultra-smooth, micro-stepping motors
- Carrying handle, and specially designed rigging system

XPERIOR Spot 300 Zoom

IXP-300SZ

SPECIFICATION:

Power supply: AC 240V ~ 50Hz
Lamp: MSD 300 Mini FastFit
Size: 427x369x597 mm
Weight: 22 Kg

NEW PRODUCT

The light and compact Xperior 300 Spot comes with the latest technology in optics and the specially designed modular, including CMY + CTO color mixing systems, a color wheel with dichroic filters, 1 rotating gobo wheel with 7 interchangeable gobos, iris, frost, a rotating 3-facet prism and a linear zoom with a range from 15° - 35. The full package of effects and colors fulfills the demands for touring, rental, theatre, clubs, etc.

Construction
- Stylish design with fire retardant plastic housing
- Module design for easy maintenance and fast service
- Fixation option: Pan/Tilt lock mechanism
- Fastening System: 2x Omega Clamps
- Excellent ventilation, ensuring reliable operation

Control
- DMX 512 control channels: 22/22/29 channels (3 modes)
- Remote lamp on/off control, and lamp power save mode while black-out
- Thermal sensor monitors the lamp ignition and ensures its working at the correct temperature
- Setting and addressing: blue/white LCD graphic display for easy navigation
- Data In/Out: Locking 3-pin & 5-pin XLR

Pan/Tilt
- Pan - 240°
- Tilt - 270°
- Pan/Tilt resolution: 8-bit or 16-bit
- Automatic Pan/Tilt position correction
- Easy calibration and maintenance by magnetic home positioning

Gobo1 (static gobos)

Gobo2 (glass, rotating gobos)

Additional gobos

XPERIOR Beam 300

IXP-300B

SPECIFICATION:

Power supply: AC 240V ~ 50Hz
Lamp: MSD 300 Mini FastFit
Size: 437x369x604 mm
Weight: 20 Kg

NEW PRODUCT

Featuring a superior package of CMY color mixing, rotating gobo wheel, color wheel, rotating prism and frost. The compact and punchy Xperior 300 beam offers the best price-performance ratio, ideal for a wide range of applications. With its very powerful, bright "searchlight-like beam, it rocks all the venues with amazing effects.

Construction
- Stylish design with fire retardant plastic housing
- Module design for easy maintenance and fast service
- Fixation option: Pan/Tilt lock mechanism
- Fastening System: 2x Omega Clamps
- Excellent ventilation, ensuring reliable operation

Control
- DMX 512 control channels: 18/18/25 channels (3 modes)
- Remote lamp on/off control, and lamp power save mode while black-out
- Thermal sensor monitors the lamp ignition and ensures its working at the correct temperature
- Setting and addressing: blue/white LCD graphic display for easy navigation
- Data In/Out: Locking 3-pin & 5-pin XLR

Pan/Tilt
- Pan - 540°
- Tilt - 270°
- Pan/Tilt resolution: 8-bit or 16-bit
- Automatic Pan/Tilt position correction
- Easy calibration and maintenance by magnetic home positioning

Gobos

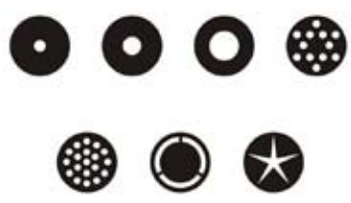

iRock 575

IR-575-MSR

NEW PRODUCT

iRock 575S is a new star of the iRock family. Excellent optical design achieves superb high efficiency along with powerful output.

Control
- DMX 512 control channels: 8/14
- Controlled by customized iLead controllers or any universal DMX controllers
- Setting and addressing: 4 digit LED display with an on/off setting
- Data In/Out: 3-pin XLR

Pre-programmed function
- Automatic switching between music trigger or auto trigger mode.
- Master/Slave mode: i.) No need to designate which unit is master or slave, the first unit in the chain will always act as the master unit. ii.) Built in dynamic lighting shows for instant operation.
- Easy controller CA-8, enjoy many lighting shows at your fingertips

Pan/Tilt
- Pan: 180°
- Tilt: 70°

Gobo Wheel
- 5 rotating interchangeable gobos plus open
- Magnetic position for continuous rotating
- shaking effect

Color Wheel
- 6 colors plus white
- with rainbow effect

Dimmer/Shutter
- 0-100% dimmer
- Independent strobe and variable speed strobe

Optics System
- High efficiency optical system
- High quality optical lens, dichroics colors, and gobos
- Beam angle : 15°

Construction
- Ultra-smooth, micro-stepping motors
- Accessory: bracket

Electrical and Specification
- Power Supply: AC 240V - 50Hz
- Size: 588 x 270 x 216mm
- Weight: 21Kgs

Dynamo250

IMH-635S-ELC

DMX 512

SOUND ACTIVATION

24V 250W

MASTER/SLAVE OPERATION

Replacement Lamp Options:

Order Code	Avg Life (Hours)	Manufacturer
BX-AB-ELC5	500	XenPow

Dimensions/Weight:

Length	Width	Height	Weight
385mm	170mm	122mm	3.8kgs

- DMX 4 Ch. Intelligent lights with flat mirror (IMH-635S-ELC) and multi faceted barrel reflector (IMH-635B-ELC).
- Pan: 150°; Tilt: 70°.
- 10 Gobos plus open and blackout on the Gobo/Color Wheel.
- Gobo shaking effect, strobe & rainbow effects with variable speed.
- Great built-in programs in master/slave mode triggered by music.

DynaRock

IMH-635B-ELC

- Units automatically switch to master/slave mode when DMX signal is not present.
- Optional CA-8 Easy Controller: (ICA-8)
- Electronic transformer, focus adjustable and easy lamp access door.
- Fan cooled, featuring an added thermal switch for overheat protection.

Theatre Spot

TS-0500
TS-1000

Power supply: AC 240V ~ 50Hz
Power Consumption: TS-500 514W | TS-1000 1024W
Lamp: TS-500 (T25) 500W
TS-1000 (T19) 1000W

Size: 337 x 202 x 292 mm
Weight: TS-500 4.0kgs
5.2kgs (with barn door)
TS-1000 5.4kgs
7.0kgs (with barn door)

Features and Benefits
- Fresnel lens for wide spot coverage. Beam angle adjustable from 11˚ to 66˚
- Protective lens mesh

Structure
- Long body ensures an excellent ventilation
- Adjustable mounting bracket included for easy installation
- Barn door and safety cable (all sold separately) are available

NEW PRODUCT

iColor4

IC-4

DMX 512 | STAND ALONE OPERATION | PRE-PROGRAMMED | MASTER/SLAVE OPERATION

Used with CA32 Controller

- DMX 4 channels: Color, Chase, Speed and Dimmer
- Great pre-programmed lighting shows under Master/Slave linkage triggered by music, giving an amazing performance, including 32 preset colors and a variety of chase patterns
- Optional CA-8 Easy Controller or CA-8F Foot Controller for immediate, exciting lighting shows
- Fan cooled with a yoke/floor bracket

Power supply: AC 240V ~ 50Hz
Lamp: J type 500W x 4 240V included (BX-J500)
Size: 450 x 270 x 175 mm
Weight: 7.0 kgs

iColor3000

IC-3000

DMX 512 | STAND ALONE OPERATION | PRE-PROGRAMMED | MASTER/SLAVE OPERATION

- A powerful, professional color mixer comes with red, green and blue heat-resistant dichroic lenses
- Two DMX control options:
  i.) 4 channels- Color, Chase, Speed, and Dimmer, can be controlled by CA-32 Colormix/ CA-32F Colormix foot controller or universal DMX controller
  ii.) 3 channels - Red, Green, Blue color mixing controlled by universal DMX controller
- With 32 preset colors and various chase patterns
- Great pre-programmed lighting shows under Master/Slave linkage triggered by music, giving the best performance
- Fan cooled, and standable bracket
- Integral user friendly LED control panel for easy operation
- Easy Controller / foot controller CA-8 / CA-8F in Master/ Slave mode for immediate, different lighting shows

Power supply: AC / 240V ~ 50Hz
Lamp : J type 800W x 3 for 230V included (BP-13477R)
Size : 285 x 295 x 460 mm
Weight: 7.0 kgs

UVgun400

IUV400

Powerful 400W UV projector with wide dispersion angle. UVgun400 is fitted with an aluminum reflector and integral ballast. There is easy lamp replacement access from the front, via the removable lens protection mesh.
Lamp is included.

Replacement Lamp:
400W UV (BX-XPW-400)

75WStrobe

IE75B

The standard in 75W strobes.
Variable speed flash (1-12 fps).
Features Xenon Helical lamp, 1/4inch Jack, on board flash speed control.
Optional remote control via Strobe Ignitor (IBF-04D)

Replacement Lamp: BX-PX-75

GigaStrobe DMX

IBF-1500ND

1500W 2 channel DMX controlled strobe.
4 – 8 strobes can be linked in master slave mode.
Operate with pre programmed show, when multiple strobes are connected.
Thermal cut out switch for overheat protection.
Optional remote control via Strobe Ignitor (IBF-04D)
Replacement Lamp: BX-PX-1500

240V - 50Hz
Size: 448 x 126 x115mm
Weight: 4.4 kg

iLaser 0505G

ILS-505G

Control
- DMX 512 control channels: 5
- Via iLead controller or universal DMX controllers (sold separately)
- Setting and addressing: 4 digit blue LED display
- LED display with on/off setting function
- Data in/out: Locking 3-pin XLR

iSolution Operation
- DMX address can be set remotely by iLead controller.
- When the DMX signal is off, the lights will switch to Master/Slave mode automatically
- Easy installation, easy addressing, and easy operation

Power supply: 240V ~ 50Hz
Laser Power: Green 5mW
Size : 320 x 205 x 100 mm
Weight: 2.3 kgs

May not available in some states.

Stobe Ignitor

IBF-04D

Control both DMX and 0-10V strobes from this unique controller. There are four 1/4" jack outputs for analogue strobes, and a DMX output that can control a further 4 strobes (2 DMX channels each)/Strobe Ignitor features ten built-in chase programs which can be triggered automatically or via music trigger. There are controls for instant blackout, momentary flash, as well as controls for flash speed and flash intensity (for compatible DMX strobes).

*LASER PRODUCTS FOR PROFESSIONAL USE ONLY - USE IN ACCORDANCE WITH STANDARDS.

iFollow 575

iFollow +Stand
IF-0575-MSR

SPECIFICATION:
Power Supply: 240V ~ 50 Hz
Power Consumption: 575W
Magnetic ballast
Lamp: BX-NSD575
Size: 693 x 332 x 362mm
Weight: 23.0kg

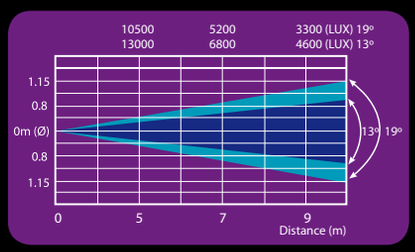

The compact iFollow 575 is a light weight and robust Follow Spot designed for TV Studio, Theatre and Stage featuring Zoom, Focus, Iris, and CMY plus Blackout. The Follow Spot delivers clear sharp beams to satisfy all your demands.

Iris
- Iris, and gobo projection (via gobo holder)

Effect Wheel
- Zoom, focus adjustable
- CMY color blades for color mixing

Focus
- Zoom, focus adjustable, and CMY for color mixing
- Zoom: 13º to 19° - 2 °to 19° (with iris)

Optics
- High efficiency optical system for optimized output

Construction
- Robust housing with excellent heat ventilation
- 3 handles for easy operation
- Adjustable mounting brackets including for easy installation
- Overload protection and fan cooled

iFollow 1000

iFollow + Stand
IF-1000-CP70

SPECIFICATION:
Power Supply: 240V ~ 50Hz
Power Consumption: 1000W
Lamp: CP70
Size: 693 x 346 x 299mm
Weight: 12kg

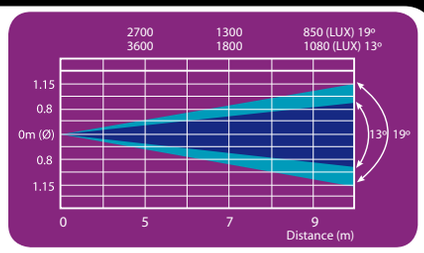

The compact iFollow 1000 is a light weight robust follow spot designed for TV Studio, theatre and stage featuring Zoom, Focus, Iris and CMYK and electronic dimmer. The Follow Spot delivers clear, sharp beams to satisfy all your demands.

Iris
- Iris, and gobo projection (via gobo holder)

Effect Wheel
- Zoom, focus adjustable
- CMYK color blades for color mixing

Dimmer/Shutter
- 5600K color temperature filter
- Electronic dimmer

Focus
- Zoom, focus adjustable, and CMY for color mixing
- Zoom: 13º to 19° - 2 °to 19° (with iris)

Optics
- High efficiency optical system for optimized output

Construction
- Aluminium housing with excellent heat ventilation
- 3 handles for easy operation
- Adjustable mounting brackets including for easy installation
- Overload protection and fan cooled

iFollow 1200

iFollow + Case + Stand:
IF-1200-MSR/FCST

Specification:
Power Supply: 240V~50Hz
Lamp: BX-HMQ1200/SGK
Incl.
Size: 1170x330x225mm
(Controller 405x360x35mm)
Weight: 44kg

Controller

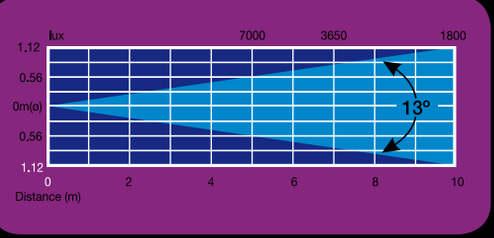

Control
- DMX 512 control channels: 6
- Settings and addressing: 4 digit blue LED display.
  LED display with on/off setting
- Data In/Out locking 5Pin XLR

Controller
- Professional 6 channel dedicated controller for followspot
- Equipment with 9 different hold-on color buttons for instant access to colors
- Slide controls for Shutter, Iris, Color, Color T temperature, Dimmer and Focus

Iris
- Motorised iris for different beam diameters Color Wheel
- 8 dichroic colors plus white
- Variable rainbow effect in both directions

Effect Wheel
- With color temperature filters (3200K & 5600K), Combined with color wheel produces 27 color effects

Dimmer/Shutter
- 0-100% dimmer
- Independent Shutter with variable speed strobe control

Focus
- Automatic focus via dedicated DMX controller

Optics
- High efficiency optical system
- High quality optical lens and dichroic colors
- Beam Angle: 13°

Construction
- Stylish Housing
- Ultra-smooth microstepping motors
- Easy control handle for pointing & focusing

Road Case

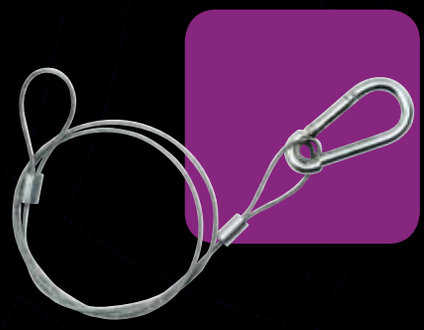

Safety Wire
LC-SW01

750mm stainless steel wire.

iColor Stand
ISPS-502

Stand for iColor or LED power bar.
Maximum height 400cm.

PushUp Stand
ILTS-09

Supports up to 30kg. Supplied with T-Bar.
Maximum height 3.5m (4ft).
(LIGHTS SOLD SEPARATELY.)

Scanner Coupler
KU-KCP-838

Heavy duty coupler for use on intelligent lights.
Extruded aluminium construction, suspend up to 200kg.
Exclusive Larger Handle For Easy Secure Tightening.

Adjustable Clamp
IC-01

Adjustable clamp, ideal for use with Mobile Truss or Push-up stand or tubes up to 1.5 inch.

2" Hook Clamp
IN-00569 (Black)
IN-00576 (Silver)

Suitable for 50mm pipe or truss.
Industry Standard .

H-Stand
IN-01566

Floor stand for lights and effects. 2"tube accepts standard HookClamps for easy professional use.

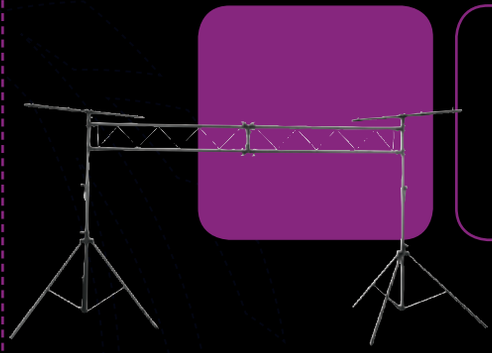

Mobile Truss
ILTS-31

Comes with two push up stands and a 3m truss.
Maximum capacity 40kg
Maximum height 2.7m

Water Wave

IWT-WAV

SPECIFICATION:
Power Supply:
240V~50Hz
Bulb: BX-AB-ELC
Size: 353x230x132 mm
Weight: 7.2kg



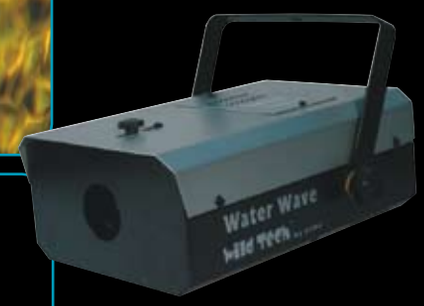

A flowing water effect with a powerful 250W light output.
Ideal for background projection.
Equipped with two effect wheels and one independent dichroic color wheel.
Focus adjustable, fan cooled, and easy lamp access door.

Inferno

IWT-IFO

SPECIFICATION:
Power Supply:
240V~50Hz
Bulb: BX-AB-ELC
Size: 353x230x132 mm
Weight: 7kg

This unique projector creates flame effects simulating a blazing inferno.

A great effect that will set any venue "on fire".

Focus adjustable and easy lamp access door.

Hallucination

IWT-HLC

Featuring a slow rotating effects wheel which projects a beam onto a multi-colored dichroic dish, to create a hallucinary effect.
Powerful 250W light output fills the venue with laser sharp beams.

Modes: Constant rotation, sound activation & static functions.

Order Code	Avg Life (Hours)	Manufacturer
BX-AB-ELC5	500	XenPow

Length	Width	Height	Weight
270mm	192mm	120mm	5.3kg

Orbiter

IWT-OBT

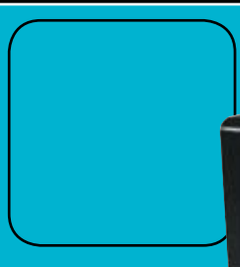

Creating dynamic swiveling effects the Orbiter features a gobo wheel and multi-colored dish which rotates back and forth.

Excellent optics produce stunning and powerful beams.

Modes: Constant rotation, sound activation & static functions.

Replacement Lamp Options:

Order Code	Avg Life (Hours)	Manufacturer
BX-AB-ELC5	500	XenPow

Dimensions/Weight:

Length	Width	Height	Weight
270mm	192mm	120mm	5.3kg

Gobo Flower

IWT-GBF

250W

SOUND ACTIVATION

PRE-PROGRAMMED

A high output gobo flower effect which projects laser sharp beams activated by music.

Twelve gobos /colors with high output optics.

Fan cooled with thermal switch for temperature protection.

Replacement Lamp Options:

Order Code	Avg Life (Hours)	Manufacturer
BX-AB-ELC5	500	XenPow

Dimensions/Weight:

Length	Width	Height	Weight
306mm	263mm	140mm	7.2kg

Kaleido

IWT-KLD

250W

PRE-PROGRAMMED

SOUND ACTIVATION

A unique, 250W kaleidoscopic effect that projects a swarm of swirling patterns. Great built-in programs with auto movement or sound activation. Link multiple Kaleido together (via mini-jack) for synchronised light shows. Precise optics with high tech gobo/color wheel. Focus adjustable and fan cooled.

Optional CA-8 Controller

Replacement Lamp Options:

Order Code	Avg Life (Hours)	Manufacturer
BX-AB-ELC5	500	XenPow

Length	Width	Height	Weight
306mm	263mm	140mm	8kg

StormBird

IMH-130

SPECIFICATION:
Power supply:
240v~50Hz
Size: 340x320x135mm
Weight: 8.5 kgs

PRE-PROGRAMMED

SOUND ACTIVATION

A creative, fabulous gobo flower with prism effect. Comes with 250W lamp, giving bright, laser-like beams. Equipped with gobo wheel, inner reflector and three facet prism.
Sound Activation; plug and play; fan cooling and focus adjustable.

Replacement Lamp Options:

Order Code	Avg Life (Hours)	Manufacturer
BX-AB-ELC5	500	Xenpow

Tomahawk

IMH-270MT

SPECIFICATION:
Power supply:
240v~50Hz
Size: 380x205x120mm
Weight: 5.0 kgs

SOUND ACTIVATION

Popular moonflower effect with scan mirror, giving rich and dynamic lighting effects. The quad-mirror projects beams over a wide area. 18 gobos including 12 single color, 2 bi-color, 2 quad-color and 2 open white. Tomahawk is constructed with a precision optical system to optimise output via the 100W EFP lamp. There are settings for either sound activation or continuous rotation.

Replacement Lamp Options:

Order Code	Avg Life (Hours)	Manufacturer
BX-AB-ELC5	500	Xenpow

HZ 500

IN-HZ-500

NEW PRODUCT

The HZ-500 is ideal for venues where silence is golden. Low Noise, below 70dB at 10cm distance. Dry haze. Metal net and filter in the intake hole can prevent hazers from clogging problems. Super low haze liquid consumption rate at 20 hours per liter.

Power: AC 240V – 50Hz • Output: 3000 cuft/min • Consumption rate - 20 hrs per litre • Tank Capacity: 2.5 Litre • LCD Timer panel controller included • Compact flight case included • Air Pressure 30Psi • Dimensions: 490 x 351 x 338mm • Weight: 31.5kg

RobeHaze 400FT

RO-10030116

The HAZE 400 FT is Robe's professional hazer.

The machine is capable of producing very large quantities of haze very quickly and quietly.
The specially designed air compressor is vibration free and virtually silent in operation.
In addition, in-built onboard DMX makes full control of the HAZE 400 FT easy.
The HAZE 400 FT delivers a high volume of fine, translucent haze into any environment and uses a mineral oil based haze liquid

RobeFaze 1000FT

RO-10030118

The versatile Robe Faze 1000 FT is equipped with the most sophisticated features and new technology including an aluminium cast heater, a very quiet pump, high precision PCB design and controllable twin fans.

The new high efficiency heater technology ensures low fluid consumption of less than one litre per two hours of continuous fogging (30% output).
The durable twin fans and the DMX Fog Control.
Remote ensures high precision output control.

RobeFog 1500FT

RO-10030114

The Robe Fog 1500 FT is the most advanced machine available for the professional performance market.
It's streamlined, stylishly contoured body features a 100% pure aluminium heater, a silent running pump and proprietary circuit design.
This highly efficient but powerful heater produces a clean, dry, highly efficient fog output.
Circuitry is resistant to external power interference and so guarantees thermal control stability.

IFOG 180

IN-IF-180

The iFOG 180 is an economical and professional fog machine that offers reliability and performance, making it perfect for mobile DJ's, parties, clubs, and home use.

Power: AC 240V ~ 50Hz • Heater: 700W • Output: 2500 cuft/min
Warm up time: 4 min • Tank Capacity: 0.8 Litre
Remote Included: On/Off Remote
Dimensions: 330 x 160 x 130mm • Weight: 4.5kg

IFOG 280

IN-IF-280

The iFOG 280 is a medium fog machine with easy loosen and clean heater.
This machine has Eco Thermal Control to keep machine in ready-to-fog status and a new design timer controller to specify the fog intervals for hands-free operation.

Power: AC 240V – 50Hz • Heater: 1000W • Output: 5000 cuft/min
Warm up time: 4.5 min • Tank Capacity: 1.3 Litre
Remote Included: Timer Remote
Dimensions: 385 x 180 x 150mm • Weight: 6kg

IFOG 320

IN-IF-320

The iFOG 320 uses regular fog fluid to produce a translucent haze in a fazer effect.
The iFOG 320 produces constant output, variable volume and timer control for hands free operation. Eco Thermal Control ensures the machine is always in ready-to-fog status and 'No liquid/Auto Cut off' makes this a very smart Fazer to operate.

Power: 240V – 50Hz • Heater: 700W • Output: 200 cuft/min
Warm up time: 4 min • Tank Capacity: 1.3 Litre
Remote Included: Timer Remote
Dimensions: 526 x 207 x 173 mm • Weight: 11kg

SmokeHaze Fluid

CODE	PRODUCT
IN-SF-05	Stage Formula Smoke Fld 5ltr
IN-SF-25	Stage Formula Smoke Fld 25ltr
LM-GMF05	Global Mix Smoke Fld 5ltr
LM-GMF25	Global Mix Smoke Fld 25ltr
AN-HZL-5	Haze 400FT or HZ500 Fluid 5ltr

DMX Manager
ICA-M26

DMX Manger is a signal merger and splitter. It features 2 DMX inputs and 6 DMX outputs. All inputs and outputs are opto-electronically isolated to protect the DMX console or any other output fixtures if one of the outputs goes faulty.

3 Input Modes
- HTP mode - The higher DMX value form input A or B will take the order
- Backup mode - When one input without DMX signal, it will take the DMX signal from another input.
- Merge Mode - Combine the DMX signal inputs together.

3 Output modes if there is no DMX input
- Null - No DMX output
- Hold - Keep the urrent DMX output
- CLR - DMX output is 0

3 pin and 5 pin XLR in/outputs
Blue LED display for easy navigation

Power supply: 240V – 50Hz
Size: 483 x 44.5 x 150mm
Weight: 3kgs

Exclusive iColor Controller
CA32
ICA-32

User friendly DMX 4 channel controller for color mix.
Equipped with nine different hold-color buttons for instant access of colors.

Comes with 32 spectrum mix colors, color fade, and 12 different chase patterns, providing the richest changing colors for the show.

Speed and dimmer adjustable for both color fade and chase.
Sound activated function available.
Full on and blackout functions.

Power supply: Includes DC 9V 300mA Plugpack
Size: 210x140x46mm
Weight: 0.93kgs

3 Channel Dimmer
ICA-316

DMX controlled 3-channel Dimmer unit with DMX input and output.
Standard 19" rack mountable.
Dip switch for DMX addressing. 3 LEDs on the front and rear panels to monitor the working condition of each channel. Mains input : 15A circuit breaker for overload protection
Output: 5A circuit breaker per channel for each socket.

Power supply: 240V – 50Hz
Size: 482 x 105 x 88mm
Weight: 2.7kgs

CA8
ICA-8

Stand By:
To black out the unit

Mode selection:
Different run modes, e.g. fast/slow, audio/manual ,Auto etc. corresponds to different functions.

Function Select:
Functions vary with different fixtures.
Different lights have different modes and different functions.

DMX Switchpack
ICA-416

4-channel switch pack with DMX input and output. DIP switches for DMX address setting.
Mains input: Maximum 15A total load max. Output: 5A per channel 4 LED's indicate the output on both the front and back panels.
Power indicator on the back panel.

Size: 480 x 100 x 88 mm
Weight: 2.35 kg

4ChLighting Chaser
ICA-410

A compact yet fully featured switching chaser unit.
Four channels and only one 19" rack unit.
Master on/off switch on front, individual channel on/off switches, select Audio or Chase mode indicated by LED's on front panel, chase mode and speed controllers plus remote control via on board DMX.

Size: 500 x 230 x 100 mm
Weight: 2.9 kgs

DMX MASTER II

ICA-1612W

Advanced universal DMX 512 control for twelve fixtures of up to 16 channels each. The DMX Master II continues the development of the popular DMX Master series with the addition of jog wheels, fog control, fixture copy and polarity swap.

Power Input: DC 9V 300mA Plugpack
Size: 482 x 132 x 76 mm
Weight: 2.3 kgs

- 30 banks of 8 scenes for a total of 240 scenes.
- 6 programmable chasers with fade and speed times.
- Blackout, tap sync, and manual override facilities. MIDI controllable
- Sound Activation capability
- Fog control button
- Fixture copy macro
- Fine Pan and Tilt control
- Assignable and reversible jog wheels

Binary addressing is additive. ie. for a DMX start address of 13, turn on the following DIP switches.

4 (DMX value = 8)
3 (DMX value = 4)
1 (DMX value = 1)

8 + 4 + 1 = 13

For a DMX start address of 1, turn on the following DIP switches.

1 (DMX value = 1)

DMX512 BINARY ADDRESSING

DIP Switch	DMX Value
1	1
2	2
3	4
4	8
5	16
6	32
7	64
8	128
9	256

ILEAD 2420

IL-2420

IL-2420 is a powerful and professional DMX console, enabling you to program and control 20 DMX fixtures, each fixture can be up to 24 channels. The iLEAD 2420 has 10 movements, 20 presets, 60 banks of 20 scenes, 20 chases, 20 cues, 20 overrides and 20 centre positions built-in for fast and easy show designing. With 24 faders, 20 function buttons, 4 rotary wheels and a LCD Display, the iLEAD 2420 allows you to easily program, edit and operate lighting fixtures.

TECHNICAL AND DATA SPECIFICATIONS

- Voltage: 240V ~ 50Hz
- 2MB internal memory
- 3.6V 80mA NI-MH battery back up
- 19" rack mountable, 6RU rack space
- Dimensions: 483 x 264 x 100mm
- Weight: 5.3kg

MAIN CONTROL FEATURES

- 2 x DMX outputs
- 484 DMX Channels in total, including 481ch for DMX fog, 482ch for future use, 483-484ch for DMX strobe
- Fixture Library (for Acme lighting fixtures), expandable up to 50 fixtures
- 10 built-in movements (Pan/Tilt, loop, fade time)
- 20 programmable chases, with 200 scenes per chase
- 1200 programmable scenes (60 banks x 20 scenes)
- 400 programmable colors and gobos (20 presets, each with 10 colors and 10 gobos)
- Control 20 DMX light fixtures, and each fixture up to 24 channels
- Operate 20 fixture groups simultaneously
- 24 faders for controlling 24 DMX channels
- 20 x Cues to combine chases together and operate chases one by one
- 20 x Overrides to assign special functions to individual fixtures
- 20 x Center positions to set each fixtures central position
- Remote DMX addressing (for Acme fixtures)
- 3 Stand by mode settings
- Jog wheel to adjust audio sensitivity – LCD screen displays value
- Standard MIDI facility
- Lighting library and software downloads available
- DMX fog machine control
- Both DMX and analog strobe control available

FRONT PANEL

- 80 Character backlit LCD display for easy programming and navigation
- 4 large rotary wheels for Pan/Tilt, Menu and Control
- 20 multi function number buttons
- 24 faders
- Strobe button
- 2 remote easy controllers (CA-8)
- Compact flash drive
- Gooseneck USB lamp

REAR PANEL

- 2 DMX outputs (3 pin XLR)
- Midi-in port and Midi-thru/bypass port
- RCA Audio input for chases and built in mic for audio trigger
- 2 5-Pin XLR connectors for remote controller
- 1 x strobe output

E:CUE LAS

Computer Based Light Controller

The E:cue LAS is a Windows™ DMX based software for the creation of complex lighting scenes and light shows. For the conversion to DMX the E:cue LAS can connect to a wide range of e:cue DMX output devices which can meet all demands, from budgetary to those of a major project.

DMX Output

The current version of the E:cue LAS supports up to 8192 DMX channels. E:cue DMX output devices can be connected to the PC via USB, serial ports or Ethernet.

Library

A comprehensive fixture library provides easy access to DMX equipment. Most known manufacturers and their products are already supported. The LAS also offers a library editor for adding new fixtures.

Programming

Programmers and lighting designers with a little experience will find that the familiar concept of cues, cuelists, sub- and grandmasters makes it easy to start working with the E:cue LAS. Cuelists support both HTP and LTP mode. There are various modes for cue fade and timing, including timecode. Cues can be made to execute a large number of actions, such as sending MIDI notes. More sophisticated programming is made possible by the included liveFX effects generator. With liveFX, you can put mathematical functions to DMX channels to achieve circular movement, ramps, sparkle effects and much more.

Last but not least, the unique E:cue LAS Wizards are there to reduce otherwise tedious and repetitive programming tasks to a few mouse clicks. Generating chasers, bitmap animations and scroll texts was never this easy!

Connectivity

The E:cue LAS is an all-rounder - future-proof thanks to the extensive number of interfaces it can use:

DMX over Ethernet (ACN READY)
DMX over USB
Timecode
WYSIWYG & Capture connect
MIDI
Serial control (RS232)
Drivers for DMX PC Card

Download E:CUE LAS (Lighting Application Suite)

EXCITE+ or other E:Cue interface device required

EXCITE+

EC-160103

PC to DMX interface with USB connector. Designed specifically to operate with E: Cue programmer LAS software.

The Excite+ is a DMX output device for PC with 1 universe of DMX (512 channels).

The device can alternately be used as a DMX input interface.

Technical Specifications:

Function: DMX output/input
Interface: USB
DMX Interface: XLR 5-Pin
LEDs/Display: 1 status LED(blue)
Max. USB devices per PC:
8 (4096 channels in total)
Power Supply: USB powered
Dimensions (W x H x L):
70 x 20 x 2000mm
Weight: 0.2kg

Special Features:

Electronics integrated in Neutrik plug

E:CUE FADER UNIT

EC-160004

Technical Specifications:

Function: manual control desk for e:cue programmer
Application area: live programming
Interface: USB
LEDs: 20 LEDs
Keys: 73 keys, 13 fader (1 grandmaster/12 submaster), 5 jog dials
Max devices per PC: 4
Power supply: USB powered
Dimensions (WxHxD): 415x280x45mm
Weight: 2 kgs
Accessories: USB A-B cable

FADER UNIT USB

Robust control desk hardware for hands-on access to e:cue programmer

The FaderUnit provides the popular conventional controls of a lighting desk, but it is specifically engineered to work with the E:cue programmer. The FaderUnit enables the programmer to become faster, easier and more enjoyable to use. 13 faders and 73 keys in a robust case provide direct access to cuelists, masters and other central features, while five heavy duty jog wheels allow quick and exact programming fixture parameters. In combination with a FaderUnit and a DMX output device, a laptop or PC becomes a high level lighting console. Up to four FaderUnits may be connected to one E:cue programmer simultaneously. This means fast control of up to 48 submasters.

XENPOW Lamps

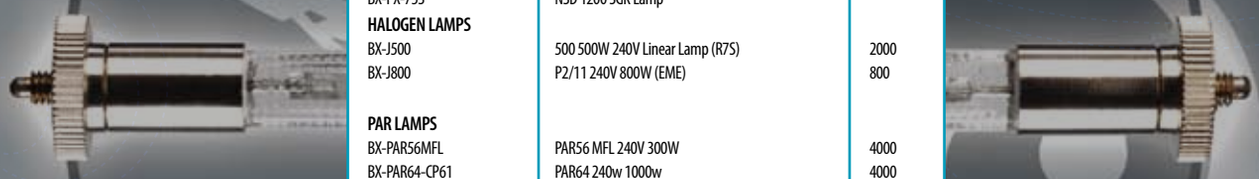

CODE	PRODUCT	LIFE(AVG)
DISCHARGE LAMPS		
BX-HID-150K	High Intensity 150W 6500K (Reflector)	2000
BX-HMQ-300K	HMQ 300 Double Ended Lamp (HTB50/DX)	750
BX-HMQ-575K	HMQ 575W 5600K Double Ended Lamp (HMI 575)	1000
BX-HMQ-575/2K	Metal Halide 575W, 7200K, Double Ended	1000
BX-NSD-150K	NSD 150 Lamp (HTI 150W)	750
BX-NSD-250/2K	Metal Halide 250W, Xenpow, 2-3KV (MSD 250)	2000
BX-NSD-575K	NSD 575 Lamp (MSD 575)	1000
BX-NSD-575/2K	NSD 575/2 Lamp	1000
BX-NSD-1200K	NSD 1200 Lamp	2000
BX-NSD-1200/2K	NSD 1200/2K Lamp	1000
BX-PX-75S	NSD 1200 SGK Lamp	
HALOGEN LAMPS		
BX-J500	500 500W 240V Linear Lamp (R7S)	2000
BX-J800	P2/11 240V 800W (EME)	800
PAR LAMPS		
BX-PAR56MFL	PAR56 MFL 240V 300W	4000
BX-PAR64-CP61	PAR64 240w 1000w	4000
CAPSULE LAMPS		
BX-64514L	64514 300W 120V	150
BX-64516	64516 240V 300W	75
BX-AB-FCR	A1/215 [FCR] 12V 100W	50
BX-AB-FCS	A1/216 [FCS] 24V 150W	50
BX-AB-EHJ	A1/223 [EHJ] 24V 250W	50
BX-AB-BRL	M32 [BRL] 12V 50W	50
REFLECTOR LAMPS		
BX-AB-EFR	A1/231 [EFR] 15V 150W	50
BX-AB-ELC5	A1/259 [ELC] 24V 250W	500
BX-AB-EFP	A1/232 [EFP] 12V 100W	50
SPECIALTY LAMPS		
BX-PX-1500	1500W Xenon Flash/StrobeTube	
BX-PX-200	200W Xenon Flash/StrobeTube	
BX-PX-75	75W Strobe Flash Tube	
BX-PX-750	750W Xenon Flash/Strobe Tube	
BX-XPW-125	UV Lamp 125W	
BX-XPW-400	400W UV Lamp	

XENPOW® LAMPS

HARDCASE CO.™

contents:

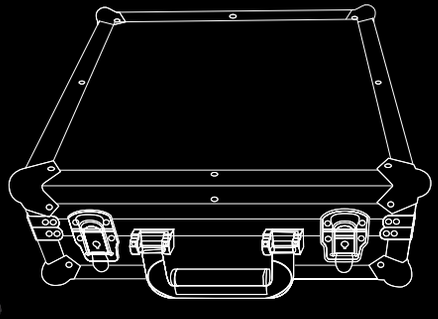

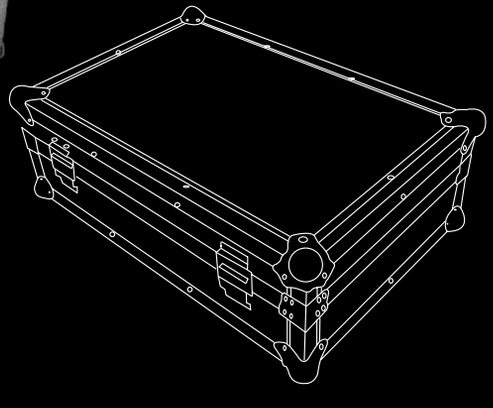

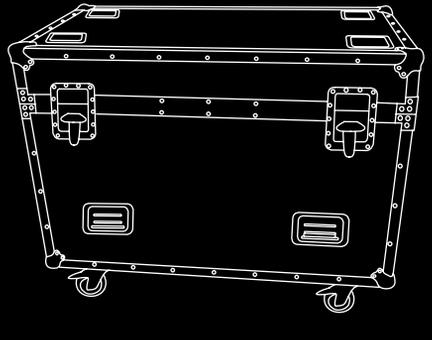

Utility Case

RC-07971

(Pick and Pack foam included)

This case is perfect for those little things that need big protection.

Made from the same quality materials as all the HardCaseCo range, this case is fitted with removable foam segments. This makes it the ideal case for custom fitting a range of fragile items.
Featuring hard wearing laminated plywood and durable metal hardware. This case is constructed to withstand the rigor of the road.

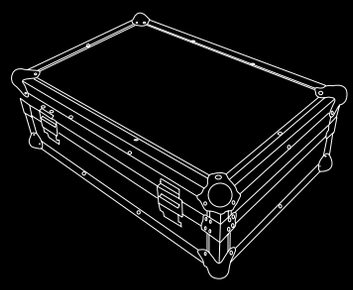

dimensions
EXT- 30cm(x)58cm(x)15cm
INT- 27cm(x)55cm(x)12cm

Microphone Case

RC-07964
Designed with complete versatility in mind. This case, along with its quality exterior has a semi customized interior.
Inside is fitted with 3 layers of foam which can be removed in segments to customize the case to accommodate various brands.

The case also features lockable latches and ball corners for extra protection. Lightweight durable construction makes it perfect for hire and touring applications.

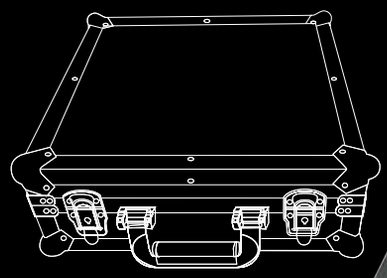

dimensions
EXT- 37cm(x)37cm(x)14cm
INT- 35cm(x)35cm(x)13cm

Dual 250 case

RC-08138

Designed to house two 250W sized moving yokes, this quality case is completely carpet and foam lined.
Features include four heavy duty wheels mounted on the re-inforced base for easy transport, along with the durable marine plywood construction.
The hardware on this case includes reinforced carry handles on all four sides, recessed wheel wells on the lid (for stacking) and hard wearing butterfly style latches.
The inside also has a separate compartment for storing mounting brackets.

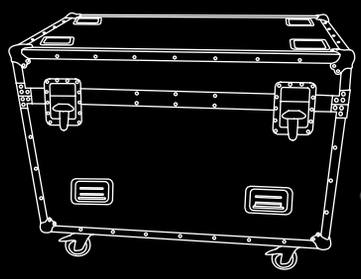

dimensions
EXT- 98.9cm(x)56cm(x)63cm
+ castors(13cm)

Dual 575 case

RC-08213
The ultimate protection for two 575W sized moving yokes, this quality case is completely carpet and foam lined.
Features include reinforced carry handles on all four sides, recessed wheel wells on the lid (for stacking) and hard wearing butterfly style latches. Inside is a separate compartment for storing mounting brackets.
Move and transport the case easily via the four heavy duty wheels mounted on the reinforced base.
Overall construction is from durable marine plywood.

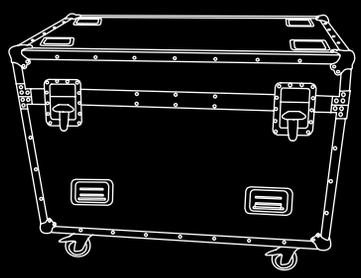

dimensions
EXT- 107.5cm(x)57cm(x)71.5cm
+ castors(13cm)

Draws case MKII

RC-43177

This case would be a welcomed addition to any production house or touring roadie.
Featuring easy slide draws, enclosed in a rolling case.
Store more tools and all those “odds and ends” in the front door compartments.
The Draw Case features quality butterfly latches, metal ball corners, reinforced handles and is constructed from strong laminated plywood.

dimensions
EXT- 57.8cm(x)62cm(x)88cm

Cable Packer MKII

RC-08312

Transport cables and leads like a pro,this packer features quality construction with the added bonus of heavy duty wheels fitted to the base for high mobility.

Completely carpet lined internally, there are two hardboard dividers which can section case as needed. The lid features four metal recessed wells for stacking cases vertically in transport. All four sides are fitted with reinforced handles and heavy duty ball corners.

dimensions
EXT- 113cm(x)56cm(x)68cm
INT- 110cm(x)53cm(x)65cm

Cable Packer - Small

RC-05298

This new packer features quality construction with the added bonus of heavy duty wheels fitted to the base for high mobility.

The lid features four metalrecessed wells for stacking cases vertically in transport. All four sides are fitted with reinforced handles, heavy duty ball corners and new PENN latches.

dimensions
EXT- 59.5cm(x)59.5cm(x)67cm
(Including Wheels)

Cable Packer - Medium

RC-05687

This new packer features quality construction with the added bonus of heavy duty wheels fitted to the base for high mobility.

The lid features four metalrecessed wells for stacking cases vertically in transport. All four sides are fitted with reinforced handles, heavy duty ball corners and new PENN latches.

dimensions
EXT- 85cm(x)59.5cm(x)72cm
(Including Wheels)